




How much water can be saved using Oxygenics Showerheads?

Flow restrictors have been placed in showerheads by manufacturers as a way to keep water usage at 2.5 GPM since it was mandated by the U.S. Government in 1992. This method of water restriction significantly decreases water pressure creating unsatisfactory shower performance. Oxygenics showerheads contain no removable restrictors and adapt to the incoming water pressure to use only what is necessary while still providing an extremely enjoyable and pressurized shower which saves a significant amount of water, energy and money.

While other industry-standard showerheads flow at 2.5 GPM at 60 PSI (national water pressure average), most Oxygenics showerheads flow at 1.9 GPM at 60 PSI, offering 30% water savings. In some cases, as much as 70% water and energy can be saved by using one of the Oxygenics low-flow models which will not flow above 1.5 GPM. Not only is this savings significant in reducing water, but it also reduces energy costs as less hot water is used.

As illustrated in the chart below, Oxygenics showerheads adapt to the incoming water pressure, so as the pressure decreases, more water and energy savings can be expected compared to industry-standard showerheads that have a constant flow of 2.5 GPM.

Water Savings Comparison Chart

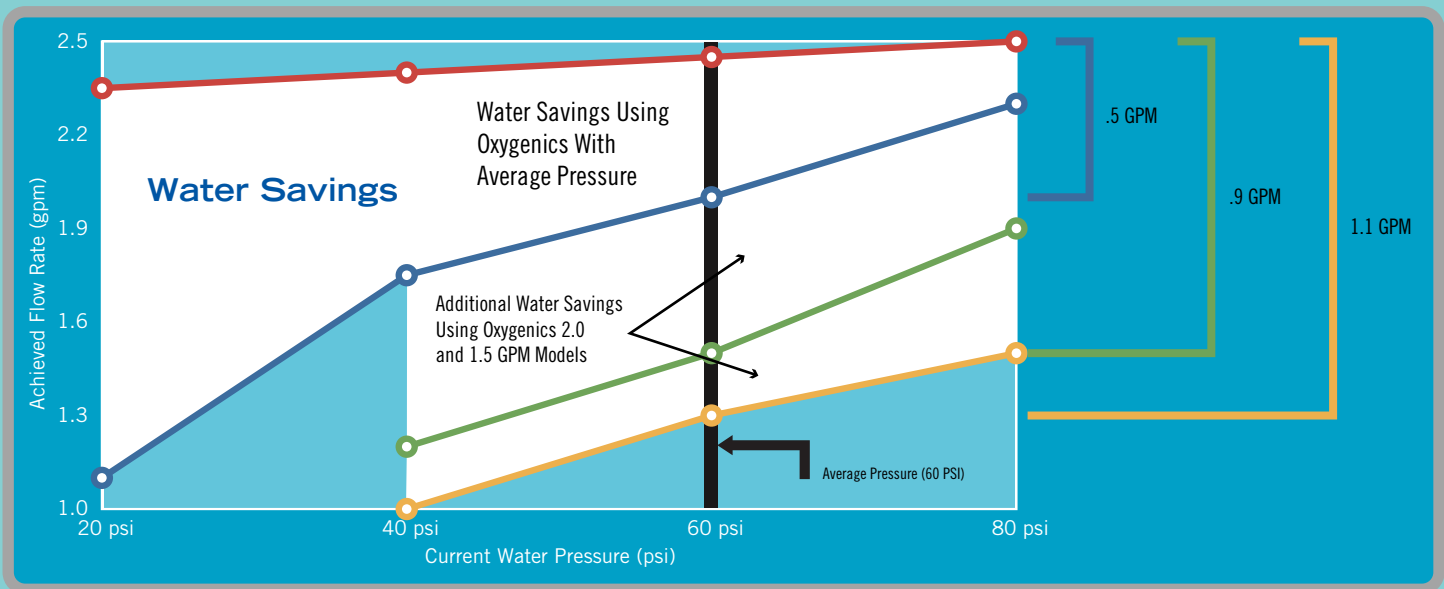

- Competitor's Showerhead
- Oxygenics 2.5 gpm Model
- Oxygenics 2.0 gpm Model
- Oxygenics 1.5 gpm Model



Oxygenics® Green

SAVES 30-70%
WATER AND ENERGY



Credits Oxygenics contributes towards: LEED New Construction

SS 4.2 Sustainable Sites: Alternative Transportation: Bicycle Storage & Changing Rooms*1 Point

WE 3.1 Water Efficiency: Water Use Reduction: 20% Reduction1 Point

WE 3.2 Water Efficiency: Water Use Reduction: 30% Reduction1 Point

EA 1 Energy & Atmosphere: Optimize Energy Performance: Option 11-10 Points

ID 1.1 Innovation & Design Process1-4 Points

Credits Oxygenics contributes towards: LEED Existing Buildings

WE 2.1 Water Efficiency 10% reduction in indoor plumbing fixture1 Point

WE 2.2 Water Efficiency 20% reduction in indoor plumbing fixture2 Points

WE 2.3 Water Efficiency 30% reduction in indoor plumbing fixture3 Points

*Eligibility depends on project